


Safety - ABCs of Fall Protection - Body Support

The full-body harness provides the necessary body support with straps that fasten around the user and distribute fall arrest forces over the upper thighs, pelvis, chest and shoulders.

Full body harnesses are mandatory for fall arrest and are attached to a shock-absorbing lanyard or self-retracting lifeline with a maximum arresting force of less than 1,800 pounds to the body.

A full body harness should be snug, but it shouldn't bind. The harness should fit so that the center grommets are used most often. Make sure all leg snaps or buckles are attached. The chest strap should be in your mid-chest area. Elastic harnesses will not absorb shock. They are simply more comfortable. Side and Front "D" rings are for positioning only! Do not punch holes in a harness to increase the size.

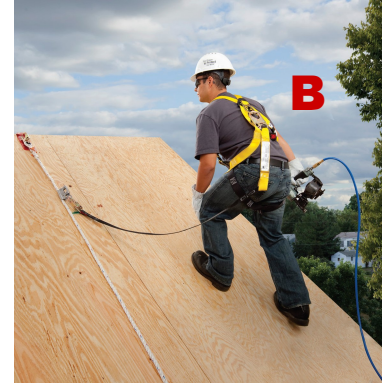

Werner Roofing Fall Protection Compliance Kit

WE-K111201

- H311002 Harness
- WE-A210400 Reusable Roof Anchor
- L210101 Lanyard
- WE-L201050 50 ft. Lifeline
- Bucket



Blue Armor 1000 Harness

- Tongue Buckle Legs**
- Medium/Large: WE-H212002
- XL: WE-H212004
- XXL: WE-H212005



Litefit Harness

- Tongue Buckle Legs**
- Medium/Large: WE-H312002
- XL: WE-H312004



Climbing/Positioning Harness

- Back, Chest, and Hip D-Rings, and Tongue Buckle Legs**
- Medium/Large: WE-H262002

XL: WE-H262004

