


Safety - ABCs of Fall Protection - Connectors

A connector, such as a shock-absorbing lanyard or self-retracting lifeline, is a device that links the user's full-body harness to an anchorage. When used with a fall restraint system, the connector must be short enough so the worker cannot reach a fall hazard.

Never tie a knot in lanyard. This will reduce the strength. Attach lanyards to back "D"-Ring only. Rope lanyard may be attached to side "D" Ring for positioning only. When using shock-absorbing lanyards, attach shock pack end to back "D"- Ring. Only use lanyards with double-locking snaps.

Retractable lifelines are faster reacting, allow a larger working area, and reduce shock. Do not use these at more than a 30° angle.

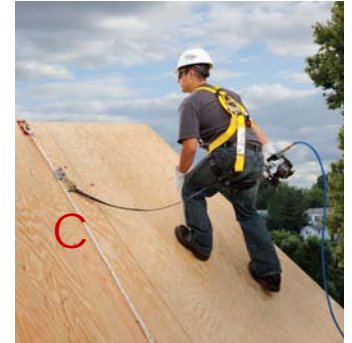

<p>Cable Retractable Lifelines</p> <p>20' WE-R210020</p> <p>30' WE-R210030</p> <p>60' WE-R210060</p>  	<p>Dual Leg Web Retractable Lifeline</p> <p>7' WE-R231007</p>  	<p>Web Retractable Lifelines</p> <p>7' WE-R230007</p> <p>10' WE-R330010</p> <p>11' WE-R230011</p>  	
<p>Tie-Back Shock Lanyard WE-C311101</p>  <p>6' Lanyard w/ 100% tie-off WE-C411100</p> <p>SoftCoil 6' Lanyard WE-C351100</p>  	<p>Dielectric Shock "Arc Flash" Lanyard FS-FS560-SE-AF</p>  	<p>3' Shock Lanyard WE-C311104</p> <p>6' Shock Lanyard WE-C341100</p> <p>Lanyard with Rebar Hook WE-C341200</p>  	
<p>6' Dual Shockwave Lanyard DBI-1244412</p>  	<p>Lifelines</p> <p>5/8" x 30' WE-L201030</p> <p>5/8" x 50' WE-L201050</p> <p>5/8" x 100' WE-L201100</p>  	<p>Auto Lock Carabiner WE-A100301</p> <p>Auto Lock Tear Drop Carabiner WE-A100303</p> <p>5/8" Rope Grab WE-L24000</p>   	<p>Swivel Link Rebar Positioning Assembly WE-C191204</p>  