

(PLEASE PRINT LEGIBLY)

Name _____ Date _____
(first) (middle) (last)

Address _____
(street) (city) (state) (zip)

Company Name _____

Address _____
(street) (city) (state) (zip)

Age _____ Birth date _____ Bus. Phone _____ Email _____

**DRAW A CIRCLE AROUND THE CORRECT ANSWER
 "T" FOR TRUE; "F" FOR FALSE**


- | | | |
|--|---|---|
| 1) Operators, assistants and bystanders must wear eye and hearing protection when using Powder Actuated Tools or in an area where tools are being used. | T | F |
| <hr/> | | |
| 2) Before using any Ramset low velocity tool, the operator must check to be sure the tool is unloaded, in good mechanical condition, no foreign objects in the barrel, and the safety features are working properly. | T | F |
| <hr/> | | |
| 3) Placing a hand or finger over the fastener end of a loaded tool can result in a serious injury. | T | F |
| <hr/> | | |
| 4) A warning sign stating "Powder Actuated Tool in Use" is not required to be posted in the work area where tools are being used. | T | F |
| <hr/> | | |
| 5) Never leave a loaded tool unattended. | T | F |
| <hr/> | | |
| 6) It is not important to read the entire tool manual before operating the tool. | T | F |
| <hr/> | | |
| 7) The loading sequence for Powder Actuated Tools is "Fastener First, Chamber Powder Load Last". | T | F |
| <hr/> | | |
| 8) Never place your finger on the trigger of a tool until you are ready to make the fastening. | T | F |
| <hr/> | | |
| 9) Keeping the tool perpendicular to the work surface is not important to insure proper fastening. | T | F |
| <hr/> | | |
| 10) Test fastenings should always be made with the lowest power level available for the tool. | T | F |
| <hr/> | | |
| 11) The spall guard supplied with the tool by the manufacturer must be used on the tool whenever possible. | T | F |
| <hr/> | | |
| 12) When raising the loaded Ramset pole tool, one must be careful not to bump the tool on the end and cause an accidental discharge. | T | F |
| <hr/> | | |
| 13) Power loads should be stored in a secured, cool, dry place. | T | F |
| <hr/> | | |
| 14) Any material not passing the "Center Punch Test" is not suitable for powder actuated fastening. | T | F |
| <hr/> | | |

- 15) The operator must inspect the base materials to be certain it consists of mild steel, concrete, or other solid non-brittle masonry material. T F
-
- 16) When fastening into structural steel, the thickness of the steel is not important. T F
-
- 17) Safe use of Ramset Powder Actuated Tools is the responsibility of the operator. T F
-

TEST FOR COLOR BLINDNESS

Fill in the correct letter for each color listed at left.

- | COLOR | LETTER |
|------------|--------|
| 18) GRAY | _____ |
| 19) BROWN | _____ |
| 20) GREEN | _____ |
| 21) YELLOW | _____ |
| 22) RED | _____ |
| 23) PURPLE | _____ |

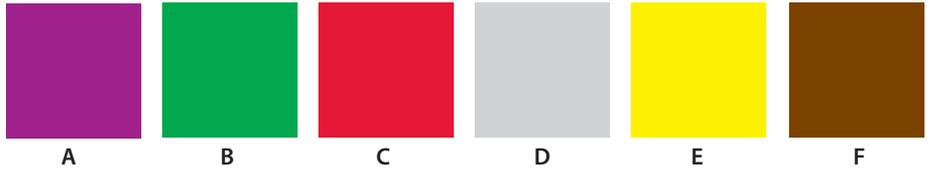

I AM ____ I AM NOT ____ color deficient in my vision and have demonstrated my ability to distinguish the load power levels used by Ramset according to color and power level number system.

SIGNATURE _____ OPERATOR APPLICANT

⚠ DANGER ⚠ Failure to read, understand and follow the detailed warnings and rules for safe operation of a powder actuated tool can result in serious injury or death to the operator or bystanders.

This certifies that _____ has received instruction in the proper operation and use of the Ramset powder actuated fastening tools of the models specified, has successfully passed both the written and practical tests to qualify as an operator of the tools listed below. As a tool operator, I agree to adhere to the regulations governing the safe use of Ramset powder actuated tools and certify that I meet the legal age requirement of the jurisdiction(s) in which I will use Ramset powder actuated tools.

TOOL MODELS CERTIFIED TO USE: _____

(Instructor Signature)

(Operator Signature)

(Instructor Card No.)

(Operator Card No.)

(Date of Instructor Card)

(Date)

ALL OPERATOR CARDS ARE ISSUED BY AN AUTHORIZED INSTRUCTOR UPON SUCCESSFUL COMPLETION OF THIS TEST. TESTS ARE TO BE KEPT ON FILE BY THE AUTHORIZED INSTRUCTOR. OPERATORS TESTS SHOULD NOT BE SENT BACK TO RAMSET.